
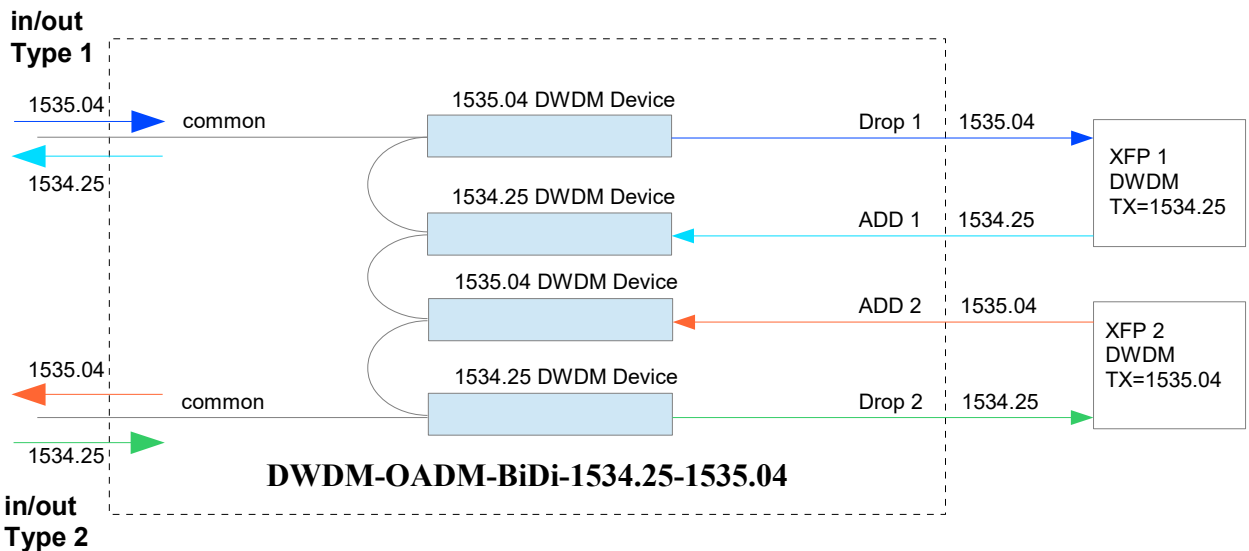


DWDM-BiDi Add Drop модуль, 1534.25нм / 1535.04нм, 2 дуплексных канала, Indoor/Outdoor, LC

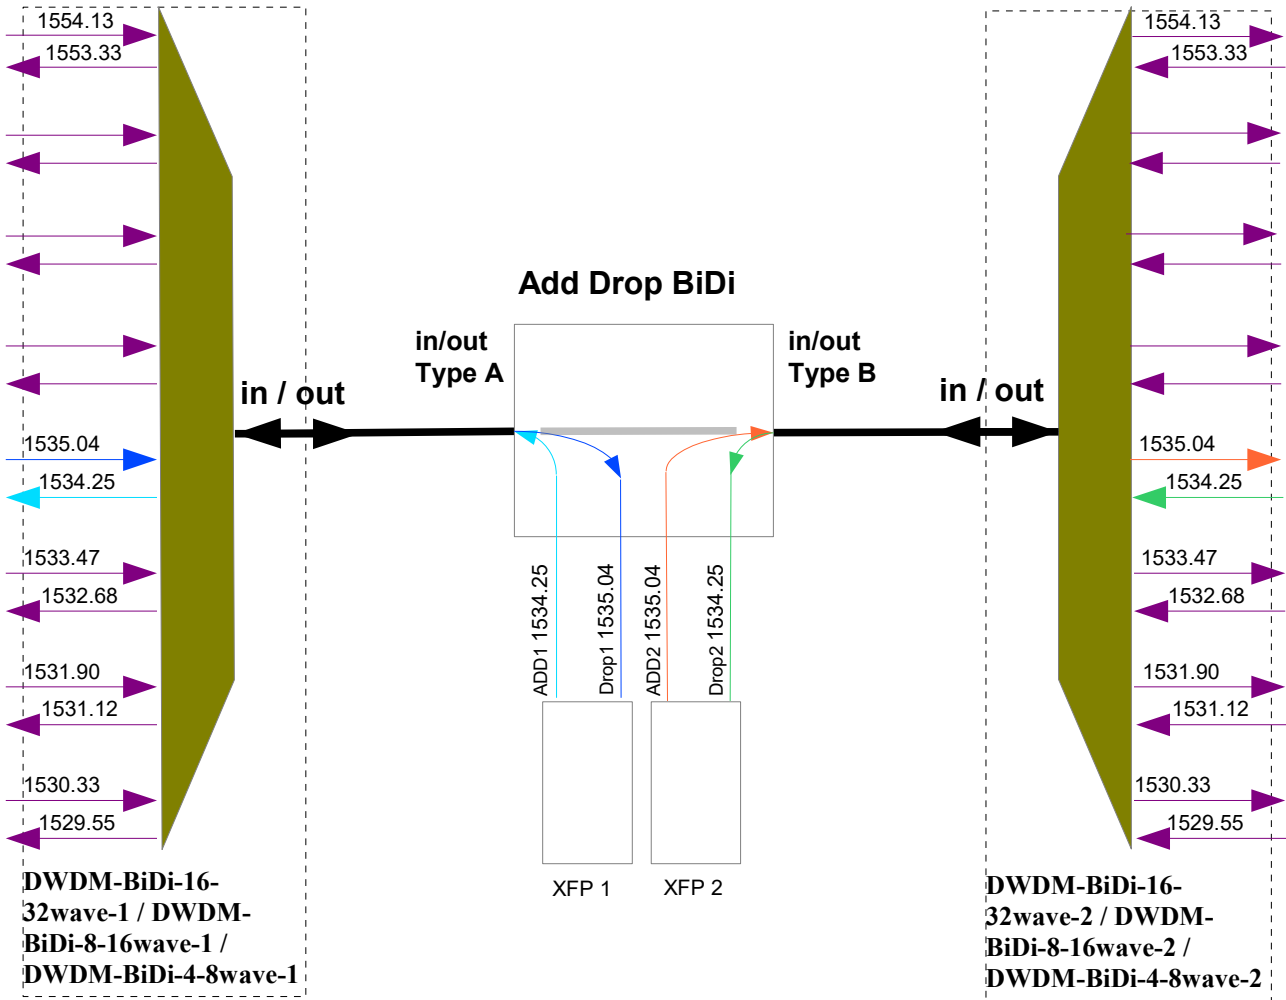

Performance:

Parameter	
Express Channel	1554.13, 1553.33, 1552.52, 1551.72, 1550.92, 1550.12, 1549.32, 1548.51, 1547.72, 1546.92, 1546.12, 1545.32, 1544.53, 1543.73, 1542.94, 1542.14, 1541.35, 1540.56, 1539.77, 1538.98, 1538.19, 1537.40, 1536.61, 1535.82, 1533.47, 1532.68, 1531.90, 1531.12, 1529.55, 1530.33
Add Drop Channel	1535.04, 1534.25 nm
Bandwidth @ -0.5dB	≥ 0.22nm
Add-Drop Channel Ripple	≤ 0.3 dB
IL @Express Channel	≤ 1.6 dB
Express Channel Isolation	≥ 12
IL @ Drop 1	≤ 1.2 dB
IL @ ADD 1	≤ 1.8 dB
IL @ Drop 2	≤ 1.2 dB
IL @ ADD 2	≤ 1.8 dB
Polarization Dependent Loss	≤ 0.15 dB
Add Drop Channel Isolation(Adjacent)	≥ 30 dB
Add Drop Channel Isolation(No-Adjacent)	≥ 40 dB
Return Loss	≥ 45 dB
Directivity	≥ 50 dB
Optical Power Handling	≥ 300mW
Operating Temperature	-50 to +70°C
Storage Temperature	-50 to +85°C
Connector Type	2 pcs LC/UPC duplex + 2 pcs LC/UPC simplex adaptors
Packaging Dimension	19" 1U-height Patch panel type